


CLAMPS AND CONNECTORS

MARATHON Ground Clamps and Connectors offer a variety of Broadband and Telecommunication grounding products to suit most grounding requirements. All MARATHON Ground Clamps and Connectors are UL listed, in stock and ready to ship. Contact your local TVC representative for more information.

Part Number	Description	Range of Equal Main & Tap	U/M	Std. Pkg. Qty.
MARG5	Ground Rod Clamp 5/8"*	N/A	EA	100
MARGC167P	Ground Clamp Piercing Vise*	8 Sol. - 4 Str.	EA	50
MARGC5004	Ground Clamp, Vise Type*	6 Sol. - 4 Str.	EA	50
MARGC5006SH	Ground Clamp Vise Type*	8 Sol. - 6 Sol.	EA	50
MARGP2	Connector, Grounding*	2 Str. - 12 Str.	EA	50
MARJ	Clamp, Ground Pipe, Bronze*	10 Sol. - 2 Str.	EA	50
MARJAB58H	Clamp, Ground Rod 5/8"*	N/A	EA	100
MARTGC	Clamp, Ground Trailer Beam Square Head*	14 Sol. - 6 Sol.	EA	50
MARTGCH	Clamp, Ground Trailer Beam Hex Head*	14 Sol. - 6 Sol.	EA	50

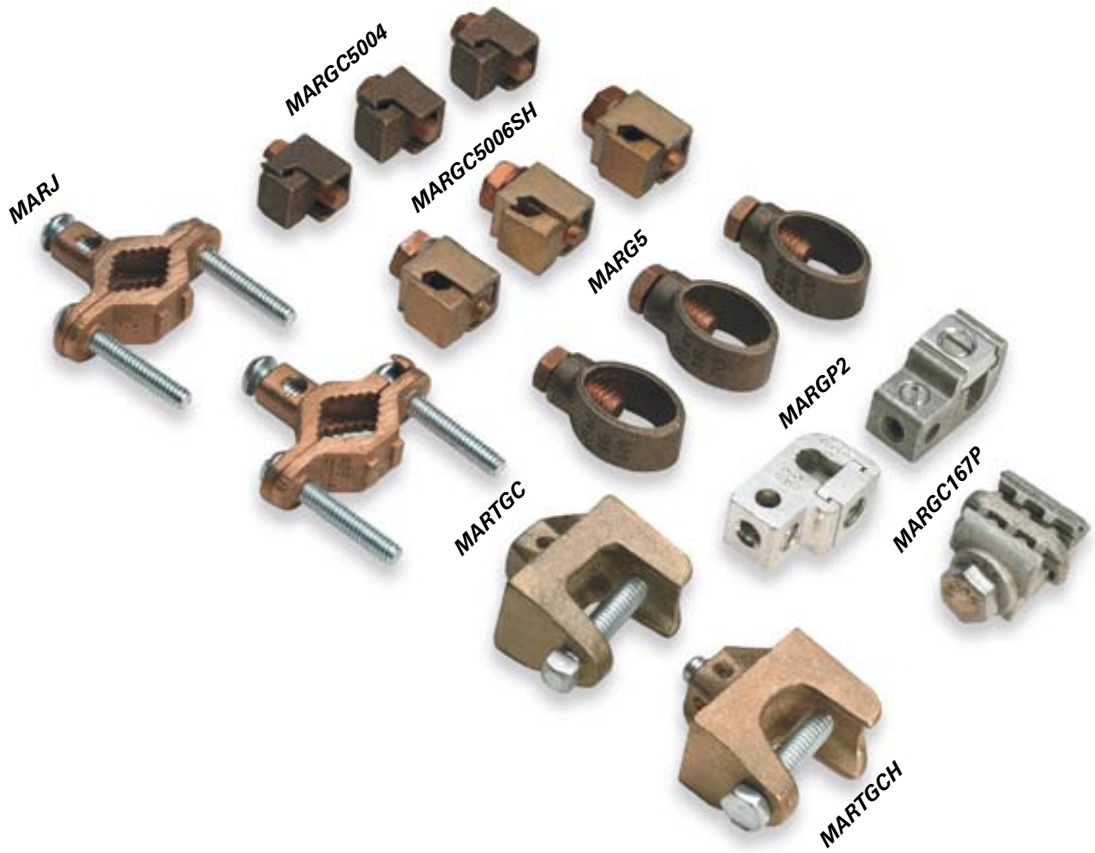


SPLIT BOLT CONNECTORS

**MARATHON** Split Bolts are used to make bonding connections between two copper ground wires. The bolt and nut are formed from high-strength corrosion resistant C210 copper.

**MARATHON** Split Bolts have a specially designed pressure bar which provides high pull out strength. Tested and UL listed to UL486A requirements.

Part Number	Description	Range of Equal Main & Tap	Carton Qty.	Approx Lbs/Ctn.
MAR1H	Connector, Split Bolt 4 SOL*	6 Sol. - 2 Str.	100	8
MAR4H	Connector, Split Bolt 8 SOL*	8 Sol. - 4 Sol.	100	7
MAR6H	Connector, Split Bolt 10 SOL*	10 Sol. - 6 Sol.	100	5
MAR8H	Connector, Split Bolt 16 STR*	16 Str. - 8 Str.	100	3

\*  **UL Listing: CU 486A Power & 467 Grounding / Suitable For Direct Burial**  
**CSA (Canadian Standards Association) Listing: C22.2 No. 65 Power & No. 41 Grounding / Suitable For Direct Burial**

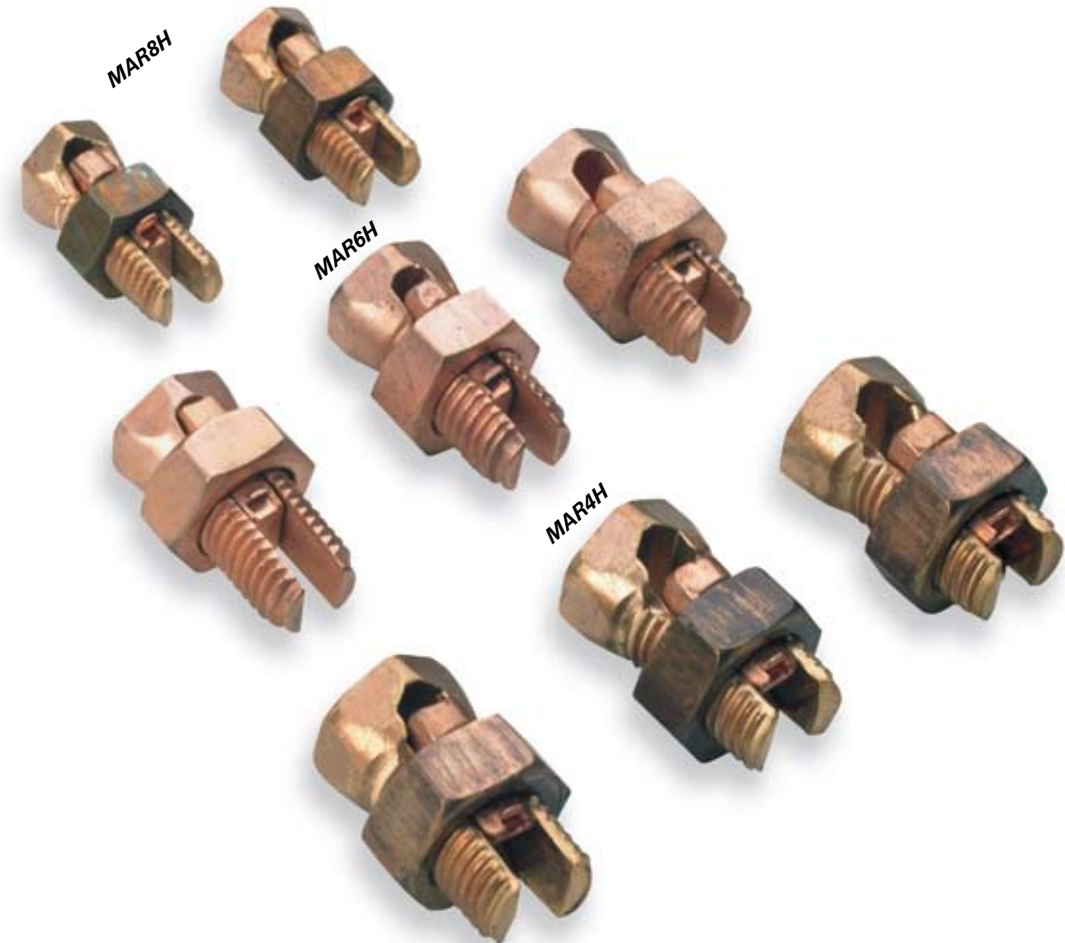

**BONDING CLAMPS**

**MARATHON** "K" Series Bonding Clamps are used to bond 1/4" and 5/16" galvanized strand to #6AWG copper ground wire.

- MARK1 Bonding Clamp is a plated bronze clamp with plating removed from one groove of clamp for steel strand to copper or copper bonded steel wire applications.
- MARK2 Bonding Clamp is bronze plated on either groove for aluminum or galvanized steel strand to aluminum or galvanized steel strand applications.
- MARK3 Bonding Clamp is not plated for copper to copper wire applications.
- MARKUL Bonding Clamp is used for all aluminum, steel and copper conductor applications. It is made of two mating copper alloy castings secured by a silicone bronze bolt.

Part Number	Description	Conductor Range	U/M	Std. Pkg. Qty.	Pkg. Wt. (lbs)
MARK1	Clamp, Bonding Strand to Copper Bond	6 sol - 1/4", 5/8" Guy strand	EA	50	7.5
MARK2	Clamp, Bonding Jumper Al/Steel Strand to Al/Steel Strand	6 sol - 1/4", 5/8" Guy strand	EA	50	7.5
MARK3	Clamp, Bonding Jumper Copper to Copper Bond	6 sol - 1/4", 5/8" Guy strand	EA	50	7.5
MARKUL*	Clamp, Bonding Jumper UL* All Al/Cu/Steel Conductors	6 sol - 1/4", 5/8" Guy strand	EA	50	7.5

\*  *UL Listed; CU 90°C UL467 Grounding & Bonding / US & Canada*

